ACRYLIC PLASTIC FLOW METER
FAC SERIES




Technical Data

Service: gas & liquid
Wetted parts material:
Body– Acrylic Plastic
O-ring– NBR, Viton
Float– SS316
Valve material: SS316
Connection material: SS316
Temperature & pressure limits:
150 psig(10bar) @ 100°F(38°C)
Temperature limit: -24°C~+54°C
Accuracy: 3% full scale
Mounting: vertical position
Weight: 0.45~0.5kg

Approvals:

Dimensions

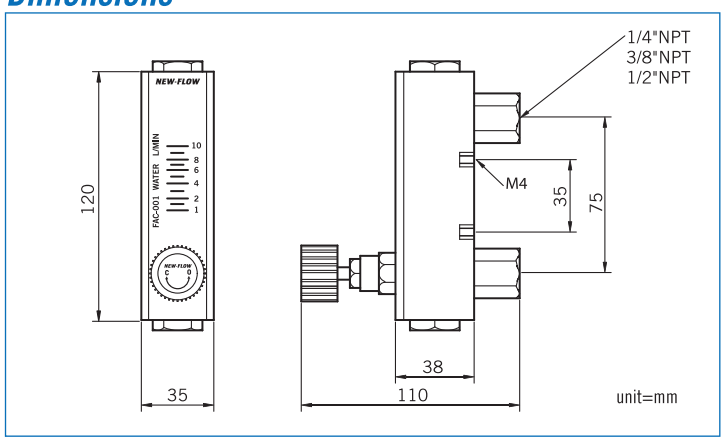

Range Table

Water		Flow Unit
FAC-001	1~10	L/M, Liter per Minute
FAC-003	0.8~8	L/M, Liter per Minute
FAC-005	0.5~5	L/M, Liter per Minute
Air		**Flow Unit**
FAC-002	2~20	Nm³/H, Normal Cubic Meter per Hour
FAC-004	1.6~16	Nm³/H, Normal Cubic Meter per Hour
FAC-006	1~10	Nm³/H, Normal Cubic Meter per Hour

Ordering Information

FAC	Code	Flow Range
	001	1~10 L/M (water)
	002	2~20 Nm³/H (air)
	003	0.8~8 L/M (water)
	004	1.6~16 Nm³/H (air)
	005	0.5~5 L/M (water)
	006	1~10 Nm³/H (air)
	007	Option

Code	Connection & valve material
S	SS316

Code	Connection size
1	1/4" NPT
2	3/8" NPT
3	1/2" NPT
4	Option

Code	O-ring material
N	NBR
V	Viton

FAC					Complete Ordering Code

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de