
FLOW SIGHT GLASS GAUGE
NS TYPE

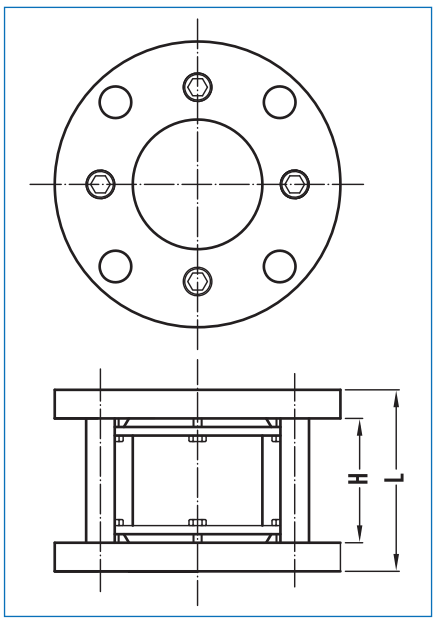

Operation Principle
The flow sight glass gauge was designed for easy observation of flowing fluid from the up or down in the pipe.

Application
A. Measuring the flow rae for:
- Chemical process system
- Water treatment system
- Industrial flow system

B. Service Condition:
- Max working temperature: 100°C
- Max working pressure: 5 kg/cm²

Dimensions


unit=mm

Size \ Range	DIMENSION			
	L	H	A	Flange
15A	150	122	–	½”
20A	150	122	–	¾”
25A	150	120	–	1”
32A	150	120	–	1¼”
40A	150	120	–	1½”
50A	150	120	–	2”
65A	180	140	–	2½”
80A	180	140	–	3”
100A	200	150	–	4”

Ordering Information

NS-TYPE	Code	Model
	NSS	stainless steel wetted parts
	NSI	steel wetted parts
	NSV	plastic wetted parts

Code	Size
	(1) 15A (2) 20A (3) 25A (4) 32A (5) 40A (6) 50A
	(7) 65A (8) 80A (9) 100A

Code	Connection Rating
	(1) JIS 5K (2) JIS 10K (3) ANSI 150#
	(4) DIN PN10

Code	Body (wetted parts) Material
	(1) CS (2) SS304 (3) SS316
	(4) PVC (5) PP (6) PVDF
	(7) Teflon (8) Option

Code	Indicating Tube Material
	(1) Glass (2) PC

Code	Seal Material
	(1) NBR (2) Viton (3) Teflon

Code	Protection Rod Material
	(1) SS304 (2) SS316

NS-TYPE					+			

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de