
OVER PRESSURE PROTECTOR

OPT

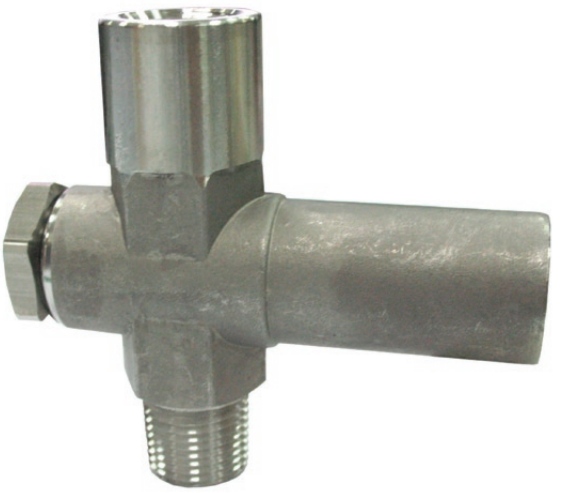

This protector be assembled with components of body, spring-loaded piston and adjusting nut as well as o-ring to protecting gauges.
The protector closed at a set point pressure when over pressure flow in to gauges.

Technical Data

Range: 0.4~250 kg/cm²
Connection Size: ½"NPT female x ½"NPT male
Material: Body- SS316
Spring-loaded Piston- SS316
Adjusting Nut- SS316
O-Ring- Viton
Max. Working Temperature: 80ºC
Max. Working Pressure: 300 kg/cm²

Adjustable Range Table

A	B	C	D	E
0.4~2.5	2~6	5~25	20~60	50~250


unit=kg/cm²

Ordering Information

OPT	Code	Process Connection
	M	½"NPT male
	Code	Gauges Connection
	F	½"NPT Female
	Code	Adjustable Range
		See adjustable range table.

OPT				Complete Ordering Code

Dimensions

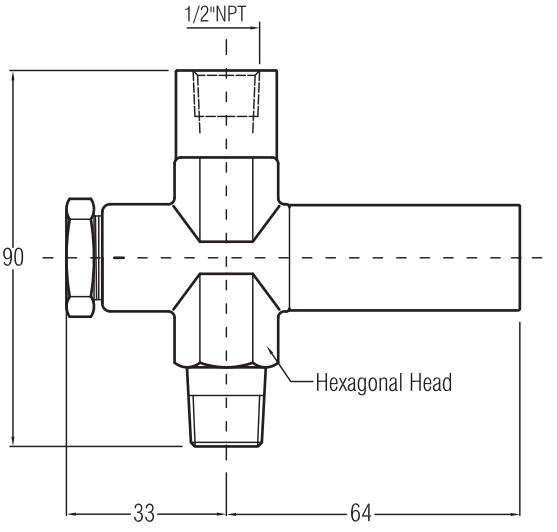

unit=mm

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de