
PRESSURE REDUCING REGULATOR
PRU300



Technical Data


For using gases and liquids
Inlet pressure: 1.5 Mpa maximum
Adjustable outlet pressure in ranges:
0.01~0.2 Mpa (0.1~2 kg/cm²)
0.05~0.7 Mpa (0.5~7 kg/cm²)
Operating temperature: -5 to 60℃
Diaphragm materials: Viton with PTFE lining
Body material: SS316
Seat material: PTFE
Handle wheel material: SS
Effective flow area: 4.0 mm
All ports are standard: ¼" NPT female
CV: 0.35

Standard Port Configuration




Dimensions

Round Nob

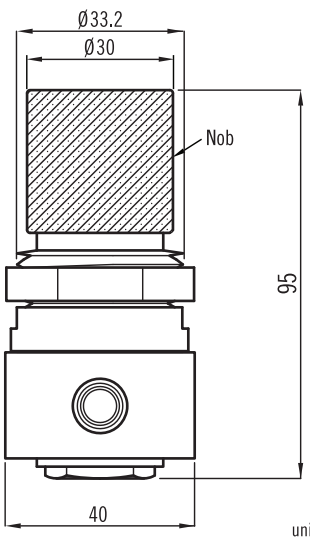

Flat-Head Nob

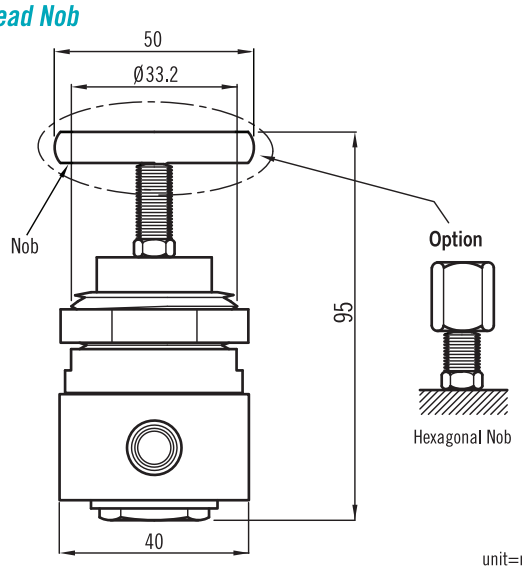

Ordering Information

PRU300	Code	Body & Nob material				
	1	316 stainless steel				
	Code	Nob Type				
	A	Round	B	Flat-Head	C	Hexagonal
	Code	Max. inlet pressure				
	1	1.5 Mpa (15 kg/cm²)				
	Code	Outlet pressure range				
	1	0.01~0.2 Mpa (0.1~2 kg/cm²)				
	2	0.05~0.7 Mpa (0.5~7 kg/cm²)				
PRU300						Complete Ordering Code

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de