
PRESSURE REDUCING REGULATOR
PRU350



Technical Data


For using gases and liquids
Inlet pressure: 1.5 Mpa maximum
Adjustable outlet pressure in ranges: 0.01~0.2 Mpa (0.1~2 kg/cm²)
0.05~0.7 Mpa (0.5~7 kg/cm²)
Operating temperature: -5 to 60℃
Diaphragm materials: Viton with PTFE lining
Body material: SS316
Seat material: PTFE
Handle wheel material: SS
Effective flow area: 8.0 mm
All ports are standard: ½" NPT female
CV: 0.6

Standard Port Configuration




Dimensions

Round Nob

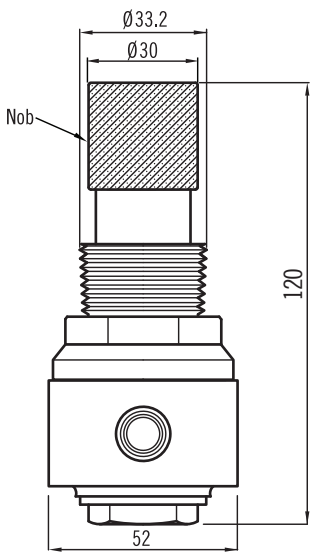

Flat-Head Nob

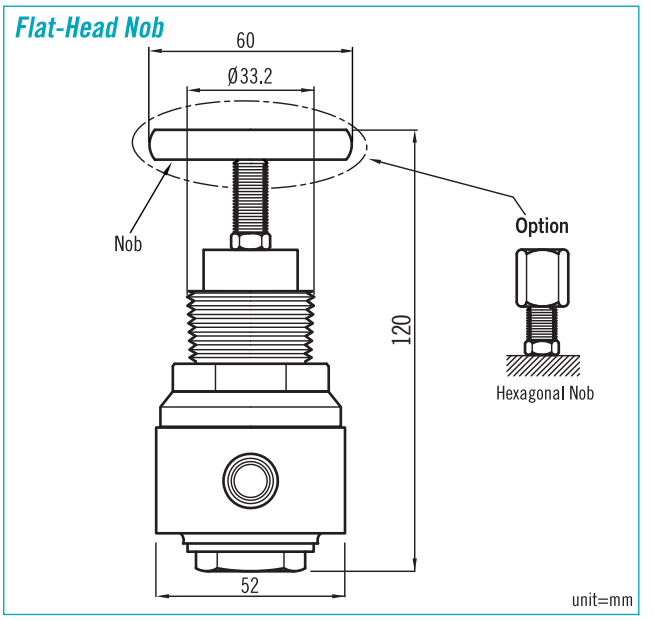

Ordering Information

PRU350	Code	Body & Nob material
	1	316 stainless steel

Code	Nob Type				
A	Round	B	Flat-Head	C	Hexagonal

Code	Max. inlet pressure
1	1.5 Mpa (15 kg/cm²)

Code	Outlet pressure range
1	0.01~0.2 Mpa (0.1~2 kg/cm²)
2	0.05~0.7 Mpa (0.5~7 kg/cm²)

PRU350					Complete Ordering Code

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de