NEW-FLOW ISO 9001 REGISTERED


PLASTIC FLOW METER SF400 – Spring Type – Without alarm switch type




Technical Data

Service: Liquid, Oil
Wetted parts material:
Body: Polycarbonate (P.C); Polysulfone (PSU) available
O-ring: Viton
Float: SS316
Connection: SS316, PVC, PVDF availalbe
Spring: SS316
Connection size: 1½", 2"NPT female available
Mounting: Vertical and Horizontal available, various flow directions
Accuracy: ±5% full scale
Max. wroking pressure limit: 1.2 MPa (12 kg/cm²)
Max. test pressure: 2.0 MPa (20 kg/cm²) (water 25°C)
Max. working temperature limit: -10°C to 60°C (for PC body); -10°C to 80°C (for PSU body)

Dimensions-mm

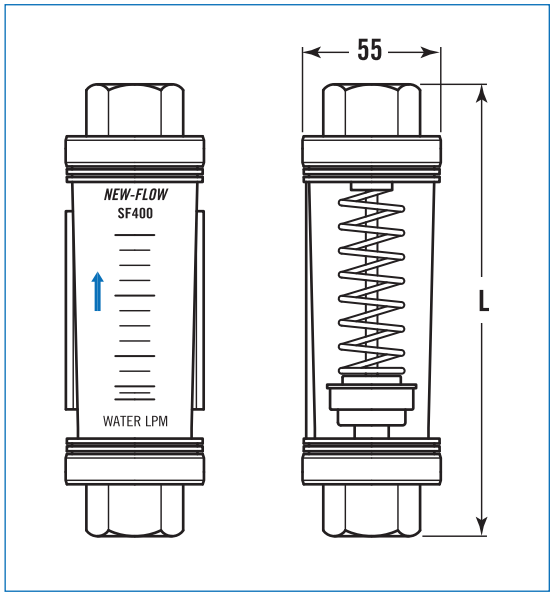

Flow Direction Types

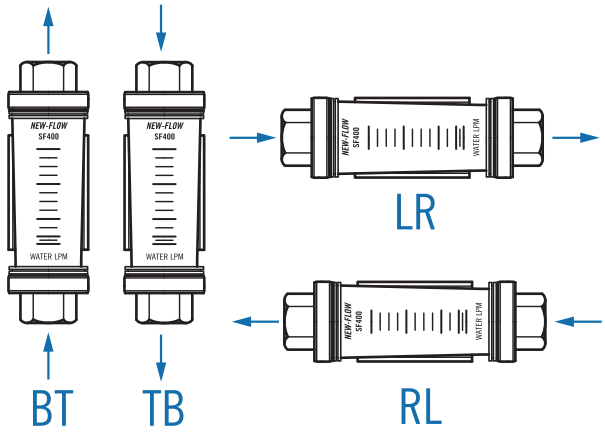

Ordering Information

SF400	Code	Flow Range (LPM-Litter per Minute)							
	A	25~250 LPM (only 1½" available)							
	B	50~500 LPM (only 2" available)							
	Code	Body Material							
	PC	Polycarbonate	PSU	Polysulfone					
	Code	Connection Material							
		(1) SS316 (2) PVC (3) PVDF							
	Code	Process Connection in Female							
		(A) 1½"NPT (L=385mm) (B) 2" (L=415mm)							
	Code	Flow Direction							
	BT	Bottom to Top	TB	Top to Bottom	RL	Right to Left	LR	Left to Right	

SF400						Complete ordering code

GMR Gross-Mess-Regeltechnik
Zella-Mehlis, Deutschland
Tel: +49 3682 49099 | Fax: +49 3682 49093
E-Mail: info@mess-regel.de | WWW.NEW-FLOW.DE