THREAD TYPE THERMOWELLS




Technical Data

Welded type: WST, WLT,
Drilled bar stock type: BST,BLT,BTT,BTLT,BPST,BPLT
Material: SS304, SS316, SS316L, Monel, Hastelloy C 276,
Brass, Carbon Steel, Titanium (special material available upon request)
Process connection: ½″ ~2″ male available (special thread upon request)
Instrument connection: ½″NPT, ¾″ NPT Female available
(special thread upon request)

Thread Wells Series


Model : WST(Welded Standard Thread Type)

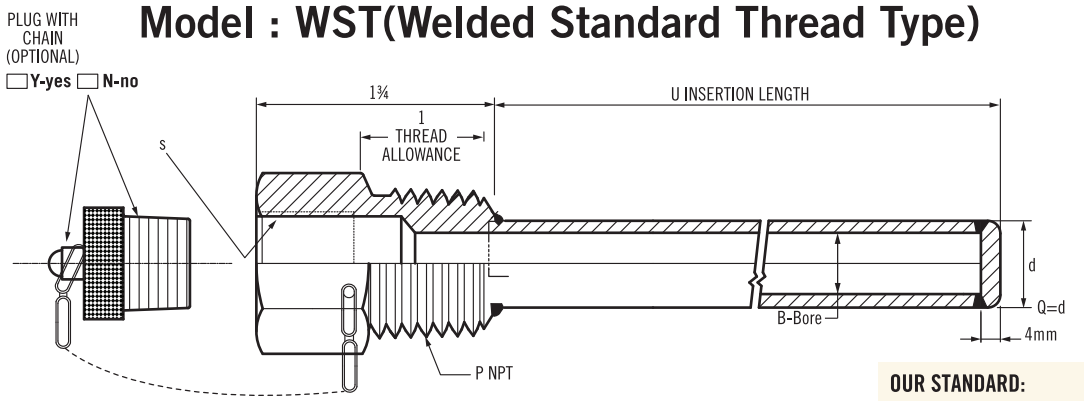

Tube Welded Type

OUR STANDARD:
(1) O.D-10 , I.D-7mm
(2) O.D-12 , I.D-9mm
(3) O.D-14 , I.D-10mm
No custom request for this type!

Model : WLT(Welded Lag Thread Type)

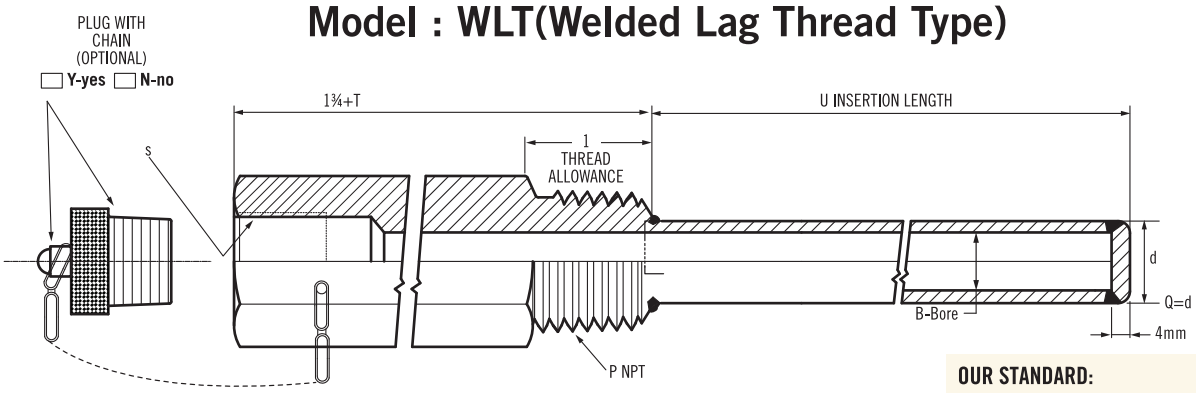


Tube Welded Type

OUR STANDARD:
(1) O.D-10 , I.D-7mm
(2) O.D-12 , I.D-9mm
(3) O.D-14 , I.D-10mm
No custom request for this type!


WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de

Model : BST(Straight Standard Thread Type)

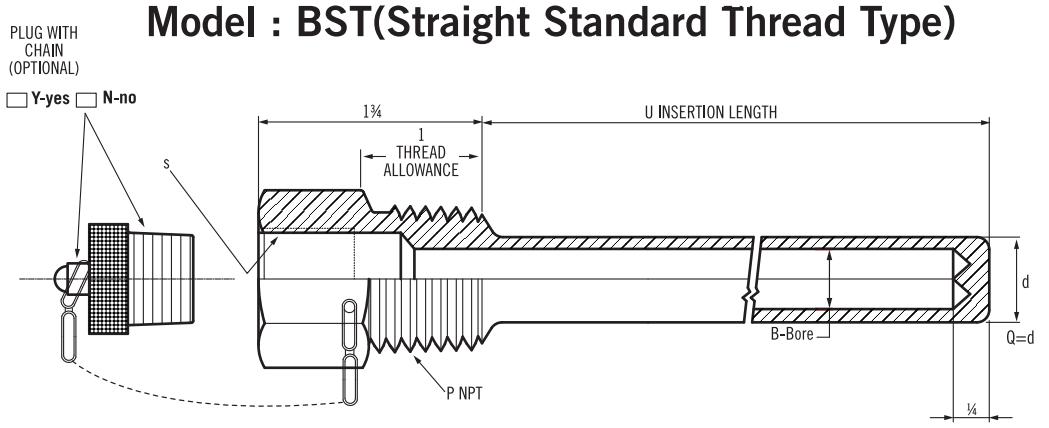


Bar Drilled Type

Model : BLT(Straight Lag Extension Thread Type)

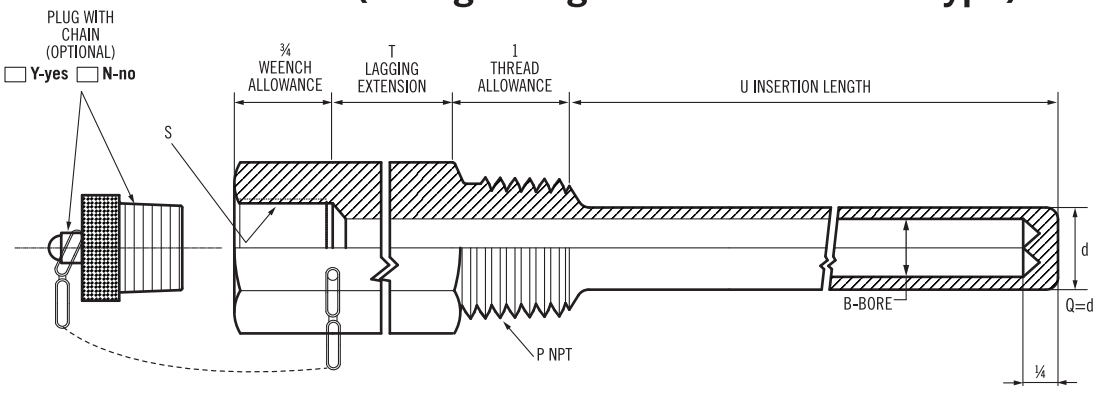

Bar Drilled Type

Model : BTT(Tapered Standard Thread Type)

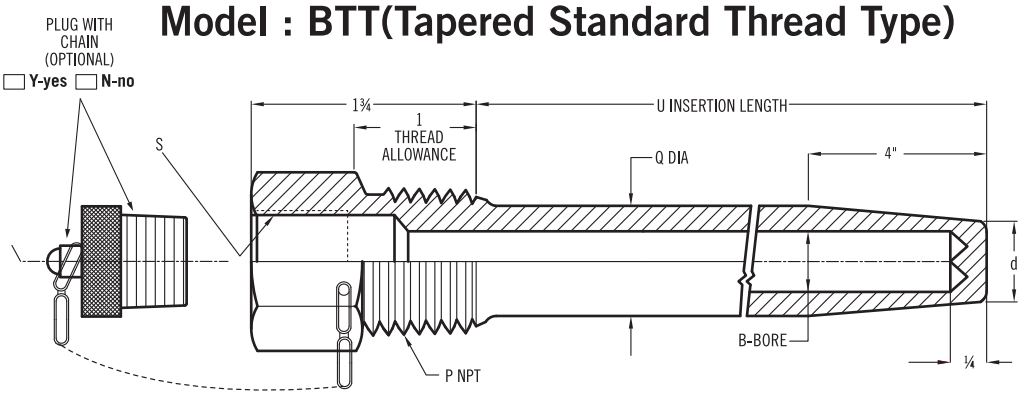


Bar Drilled Type

Standard: Q x d
(1) 19 x 15mm
(2) 25 x 22mm
(3) 22 x 19mm

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de


Model : BTLT(Tapered Lag Extension Thread Type)

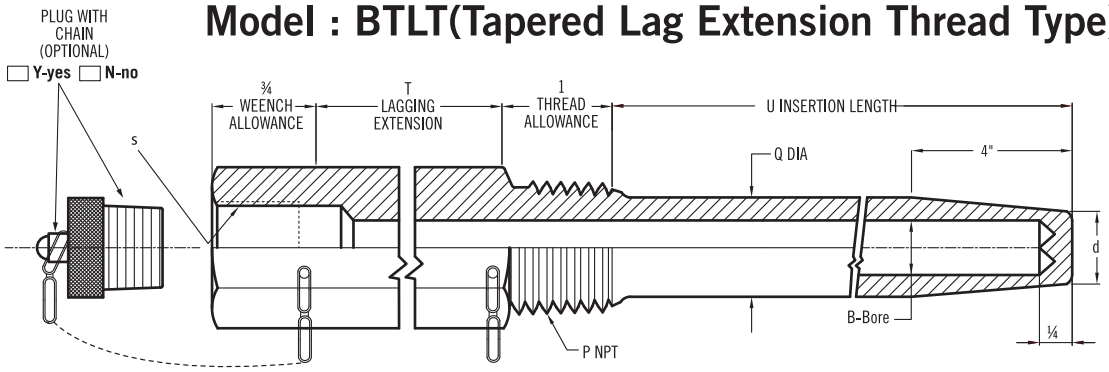

Standard: Q x d
(1) 19 x 15mm
(2) 25 x 22mm
(3) 22 x 19mm


Bar Drilled Type

Model : BPST(Stepped Standard Thread Type)

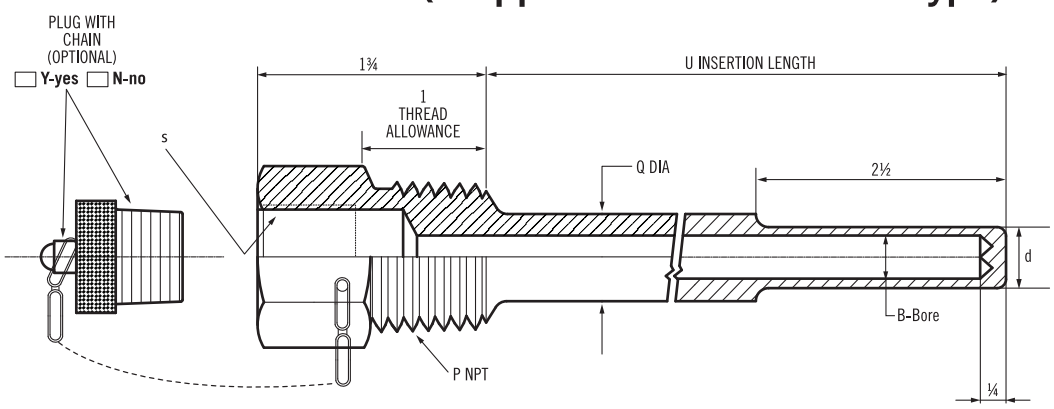

Bar Drilled Type

Model : BPLT(Stepped Lag Extension Thread Type)

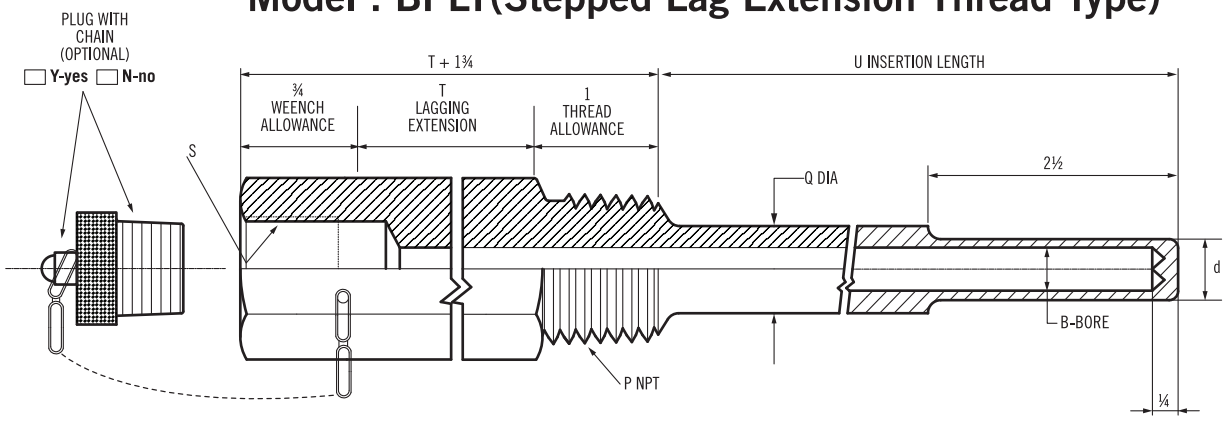

Bar Drilled Type

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de

Ordering Information

Model	Configuration Style							
	WST	WLT	BST	BLT	BTT	BTLT	BPST	BPLT

Code	Material	Code	Material
CS	Carbon Steel	MO	Monel
S1	304 Stainless Steel	HC	Hastelloy C276
S2	316 Stainless Steel	Ti	Titaninum
S3	316L Stainless Steel	OP	Option (please indicate material)

Code	Process Connection (P)
	(1) ½″ (2) ¾″ (3) 1″ (4)1½″ (5)2″ (6) option (please indicate size)

Code	S-Instrument Connection		
A	½"NPT Female	0	option
B	¾"NPT Female		

Code	Lag Length "T"		
No	0	T6	6″
T3	3″	Tn	option (please indicate ength)

Code	"Q" Diameter (mm)
	Please directly fill in the required diameter.

Code	"d" Diameter (mm)
	Please directly fill in the required diameter.

Code	"B" BORE Diameter
	(1) Ø6 (2) Ø7 (3) Ø8 (4) Ø9 (5) Ø10 (0) option

Code	"U" Insertion Length
	Fill in the requested length: e.g. 300mm=300u

Code	Plug with Chain
Y	Yes
N	No

										Complete Ordering Code

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de