

U-TUBE MANOMETER U SERIES

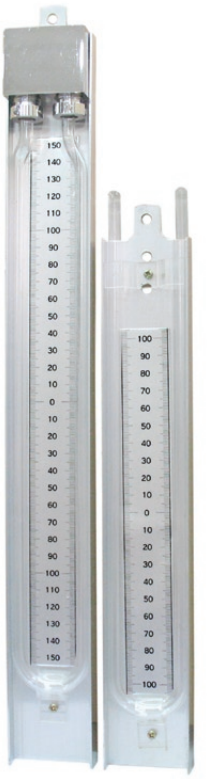

Technical Data

Economic Type
U Tube Material: Glass
Tube Size: O.D Ø8mm x I.D Ø6mm
Measure Range: Please refer to range table.
Working Pressure: Max. 3 kg/cm²
Working Temperature: Max. 80°C
Model UA Connection Size: ¼"NPT female with acrylic protection cover
Model UC Connecton Size: O.D Ø8mm, plug in hose tube directly, without acrylic protection & connection part
Material: Support–Aluminum (standard), SS304, option available
Connection Part–SS316, SS304, Aluminum, Bronze available
Seal O-Ring–NBR, Viton, Teflon available

Dimension

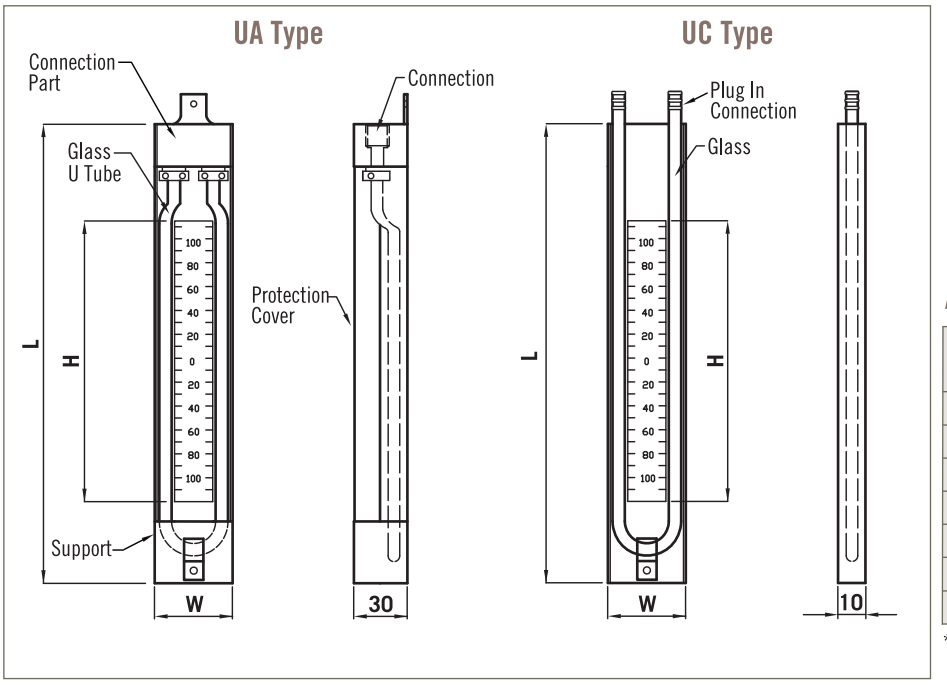

Range Table

unit=mmH₂O

Model	Range	Dimension		
		L	H	W
200	±100	300	200	50
300	±150	400	300	50
400	±200	500	400	50
500	±250	600	500	50
600	±300	700	600	50
800	±400	900	800	50
1000	±500	1100	1000	50

*Special range on request.

Ordering Information

UA/UC	Model	200	300	400	500	600	800	1000

Code	Wetted Parts Materfial		
S	Wetted parts are stainless steel	A	Wetted pars are aluminum
V	Wetted parts are bronze	N	Without for UC type

Code	Connection Size (Female)
	(1) ¼"NPT (2) ¼"PT (3) Without (for UC type)

Code	Seal O-Ring Material
	(1) NBR (2) Viton (3) Teflon (4) Without (for UC type)

Code	Protection Supporter Material
	(1) SS304 (2) Aluminum (3) Option

Code	Scale Plate Material
	(1) SS304 (2) Aluminum (3) Option

							Complete Ordering Code

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de